

Kugelhähne, 2-teilig *two piece ball valves*

Type: 2-E
(Edelstahl/stainless steel)



Technische Daten:

BAUFORM:

2-teiliges Gehäuse
voller Durchgang
ausblassichere Schaltwelle
wartungsfreie Spindeldurchführung
abschließbarer Hebel

ANSCHLUSS:

Innengewinde gem. ISO228

NENNDRUCK:

PN 64 (siehe Druck/- Temperaturdiagramm)

WERKSTOFFE / Type: 2-E

Gehäuse: Edelstahl 1.4408
Kugel: Edelstahl 1.4408
Kugeldichtung: PTFE
Spindeldichtung: PTFE
Handhebel: Edelstahl 1.4301
Kunststoffüberzug

Specification:

DESIGN:

2-piece body
full bore
anti blow out stem
maintenance free stem design
lockable handle

CONNECTION:

Female thread acc. to ISO228

PRESSURE RANGE:


PN 64 (acc. pressure/- temp.
diagram)

MATERIALS / Type: 2-E

body: stainless steel CF8M
ball: stainless steel CF8M
ball seat: PTFE
stem seal: PTFE
lever : stainless steel AISI304
plastic coated


Druck/Temperatur Diagramm *pressure temperature rating*

Type: 2-E

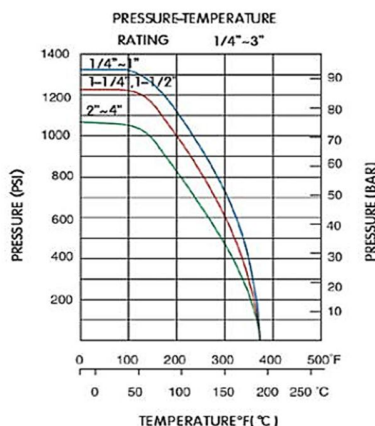

No. Bauteile / parts Werkstoffe / material

2-E		
1	Gehäuse body	1.4408/CF8M
2	Kugel ball	1.4408/CF8M
3	Spindel stem	AISI316
4	Anschlussstück cap	1.4408/CF8M
5	Gehäusedichtung body gasket	PTFE
6	Kugeldichtung seat gasket	PTFE
7	Spindelabdichtung stem gasket	PTFE
8	Spindelpackung stem packing	PTFE
9	Stopfbuchse Gland nut	AISI304
10	Handhebel handle	AISI304
11	Hebelüberzug handle cover	Kunststoff
12	Schloss Locking device	AISI304
13	Beilagscheibe washer	AISI304
14	Hebelmutter handle nut	AISI304

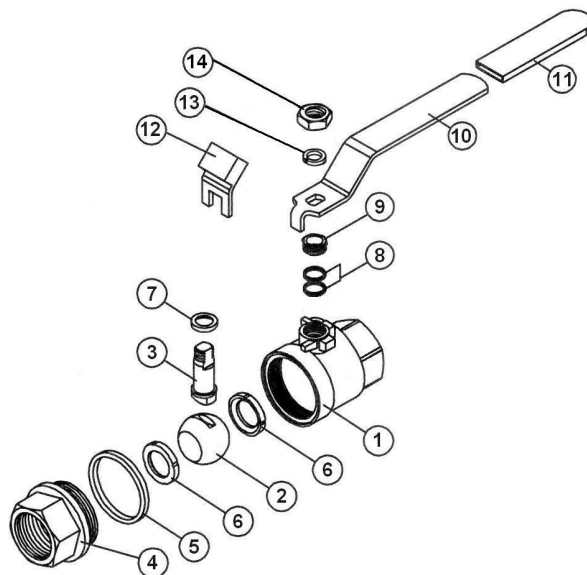

		2-E		
DN / size	ØD	L	H	E
3/8"	12,8	49	51	95
1/2"	15	57	55	95
3/4"	20	65	59	110
1"	25	78	73	135
1 1/4"	32	90,5	78	135
1 1/2"	38	105	91	165
2"	50	127	99	165
2 1/2"	65	160	130	215
3"	80	180	142	215
4"	100	220	165	310

