
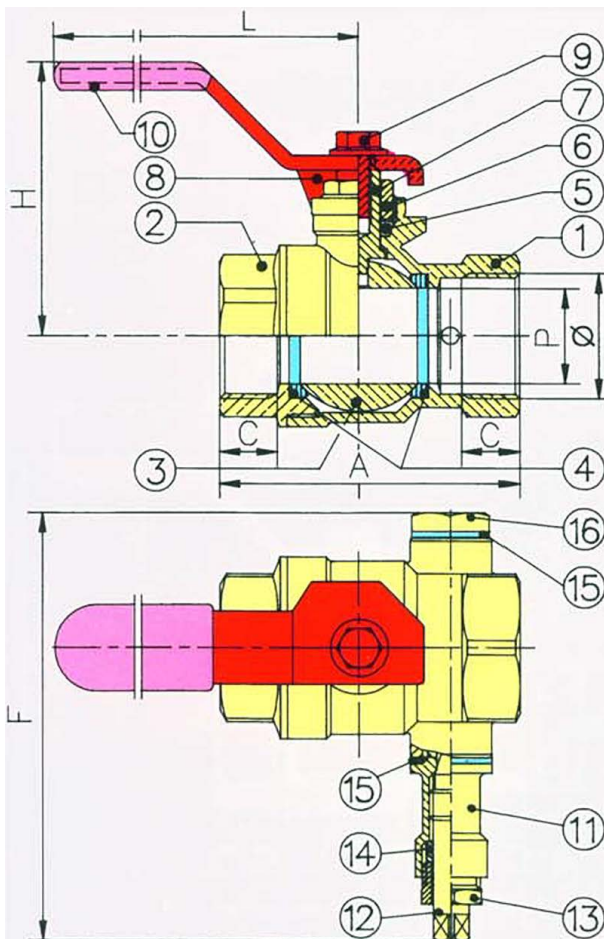


KUGELHAHN Type 827

Ø	A	C	H	L	F	P	Gr.
1/2	54.5	11.5	53	90	81	15	285
3/4	63	12	57	90	87	20	385
1	72.5	14.5	65	125	93	25	590
1 1/4	86.5	16	71	125	102	32	880
1 1/2	99	17	79	140	109	40	1300
2	115	19	87	140	123	50	1910

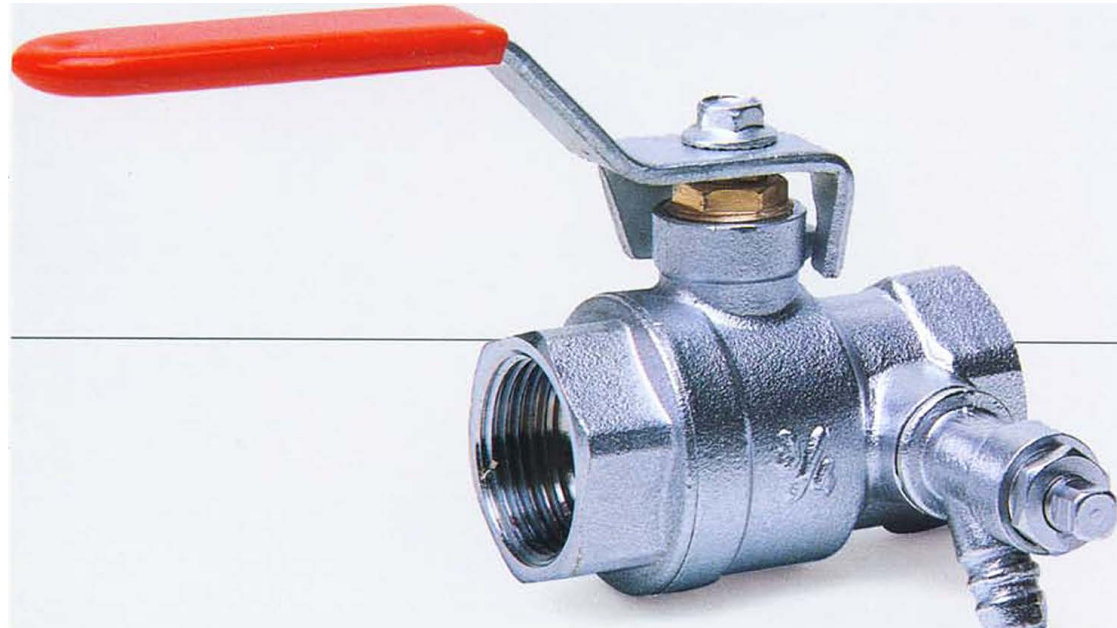

TECHNISCHE DATEN

Voller Durchgang
Max. Betriebsdruck 25 bar
Betriebstemperatur -10°C - + 150°C

TECHNIC

full bore
max. pressure 25 bar
temperature -10°C - + 150°

MATERIAL-SPEZIFIKATION

1	GEHAUSE BODY	Messing	P-CU Zn40 Pb2 UNI-5705 verchromt
2	GEWINDE-ANSCHLUSS BODY END	Messing	P-CU Zn40 Pb2 UNI-5705 verchromt
3	KUGEL BALL	Messing	P-CU Zn40 Pb2 UNI-5705 hart-verchromt
4	KUGELDICHTUNG SEATS	P.T.F.E.	BS 6564: Part 2
5	SPINDEL-DICHTUNG PACKING RING	P.T.F.E.	BS 6564: Part 2
6	SPINDELMUTTER PACKING NUT	Messing	P-CU Zn40 Pb2 UNI-5705
7	SPINDEL STEM	Messing	P-CU Zn40 Pb2 UNI-5705
8	HANDHEBEL HANDLE	Stahl	FeP11 UNI-5867 vernickelt
9	SCHRAUBE NUT	Stahl	Fe42 UNI-5334 vernickelt
10	HANDHEBEL-UBERZUG HANDLE SLEEVE	Kunststoff	P.V.C.
11	ENTLEERUNGSVENTIL DRAIN COCK BODY	Messing	P-CU Zn40 Pb2 UNI-5705 verchromt
12	SPINDEL STEM	Messing	P-CU Zn40 Pb2 UNI-5705 verchromt
13	SPINDELMUTTER PACKING NUT	Messing	P-CU Zn40 Pb2 UNI-5705 verchromt
14	SPINDEL-DICHTUNG PACKING RING	Kunststoff	P.V.C.
15	DICHTUNG GASKET	Glasfiber	659
16	STOPFEN PLUG	Messing	P-CU Zn40 Pb2 UNI-5705 verchromt