


Type: 920T.0 | Messing | ISO T-Griff | IG/IG | PN25

Type: 920T.0 | Brass | ISO T-handle | PN25 | F/F



Druck-Temperatur-Diagramm pressure-temperature-diagram

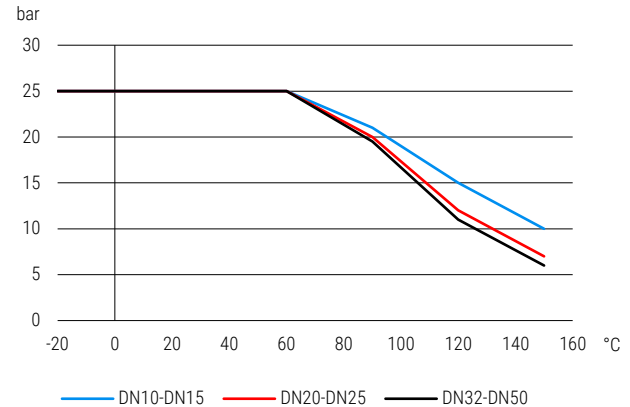

Konstruktionsmerkmale Kugelhahn

- Voller Durchgang nach DIN EN 1983
- Gehäuse aus Messing sandgestrahlt vernickelt
- Wartungsfrei
- Stopfbuchsenmutter muss in zeitlichen Abständen nachgezogen werden
- Ausblassichere Schaltwelle
- Schwimmende Kugel
- Gewinde nach DIN ISO 228-1
- Kennzeichnung nach EN 19

Standardtemperaturbereich

- 20°C bis + 150°C (abhängig vom Betriebsdruck)

Siehe Druck-Temperaturdiagramm

Verwendung

Heizungskreisläufe, Wasser allgemein, Druckluft, Tyfocor, Öl, Heizöl, Kraftstoffe

Design features ball valve

- Full port acc. to DIN EN 1983
- Brass body sand blasted and nickel plated
- Maintenance-free
- Gland nut has to be retightened within certain periods
- Blow out proved stem design
- Floating ball
- Thread acc. to DIN ISO 228-1
- Marking acc. to EN 19

Standard temperature range

- 20°C to + 150°C (depending on working pressure)

Take a look at the pressure-temperature-diagram


Suitable for

Heating circuits, general water, Compressed air, Tyfocor, Oils, Heating oil, Fuels

Datentabelle data table

D1	D2	DN	LW	PN	L	L1	MM	R	H	D	SW	Gewicht Weight (kg)
		(mm)	(mm)	(bar)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
G 3/8"	G 3/8"	10	10	25	42	8,5	21	35	61,2	28	22	0,146
G 1/2"	G 1/2"	15	14	25	46	10	23	35	63,3	28	25	0,154
G 3/4"	G 3/4"	20	19	25	51	10	25,5	35	66,8	35,7	31	0,206
G 1"	G 1"	25	24	25	64	13	32	40	79,2	43,7	38	0,336
G 1 1/4"	G 1 1/4"	32	30	25	72	13	36	40	83,2	52,5	46	0,462
G 1 1/2"	G 1 1/2"	40	37	25	84	15	42	60	113	63	53	0,720
G 2"	G 2"	50	47	25	100	16,5	50	60	120,5	78,5	66	1,085

Maßskizze measured sketch

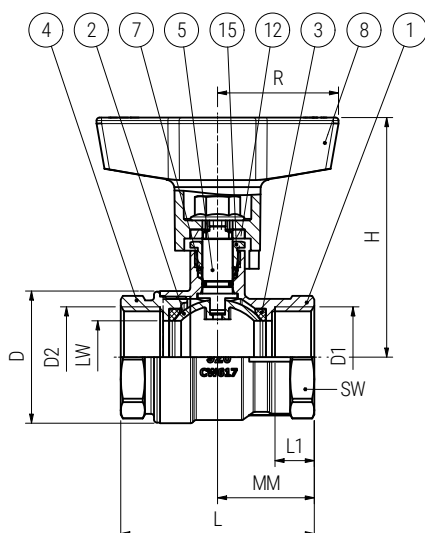

Materialtabelle materials grid

Nr. No.	Bezeichnung Description	Werkstoff Material	Materialbezeichnung Material description
1	Gehäuse Body	Messing vernickelt Brass (nickel-plated)	CW617N
2	Kugel Ball	Messing verchromt Brass (chrome-plated)	CW617N
3	Kugeldichtung Ball seal	PTFE PTFE	-
4	Flansch / Nippel Flange / nipple	Messing vernickelt Brass (nickel-plated)	CW617N
5	Schaltwelle Stem	Messing vernickelt Brass (nickel-plated)	CW617N
7	Spindeldichtung Spindle seal	FKM + PTFE FKM + PTFE	-
8	Griff Handle	Polyamid Polyamide	-
12	Packung Packing	PTFE PTFE	-
15	Packungsmutter Packing nut	Messing vernickelt Brass (nickel-plated)	CW617N