

VALVES WITH EXHAUST HOLE FOR GAUGES

Type: MH-IG/IG

Size : DN 1/4" to 1/2"
Ends : Female-Female BSP
Min Temperature : - 10°C
Max Temperature : + 90°C
Max Pressure : 16 Bars
Specifications : With decompression hole
Reduced Bore
For pressure gauge
Materials : Brass



SPECIFICATIONS :

- With decompression hole
- Reduced bore

USE :


- Not for viscous or crystallizing liquid
- Min Temperature Ts : - 10 °C
- Max Temperature Ts : + 90°C
- Max Pressure PN : 16 bars

STANDARDS :


- Manufacturer certified ISO 9001 : 2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (Article 1, § 2b)
- Threaded female BSP cylindrical ends according to ISO 228-1

MATERIALS Fig. MH:

Item	Designation	Materials MH
1	Body	Brass CW 617 N according to EN 12165
2	Stem	Brass CW 614 N according to EN 12164
3	Bonnet	Brass CW 617 N according to EN 12165
4	Packing	CHEMITON® GSFONA92
5	Packing gland	Brass CW 614 N according to EN 12164
6	Handle	Polypropylene

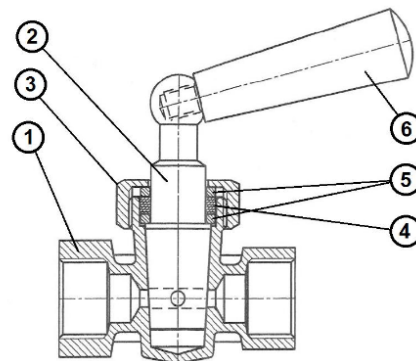

SIZE FEMALE / FEMALE TYPE Fig.MH (in mm) :

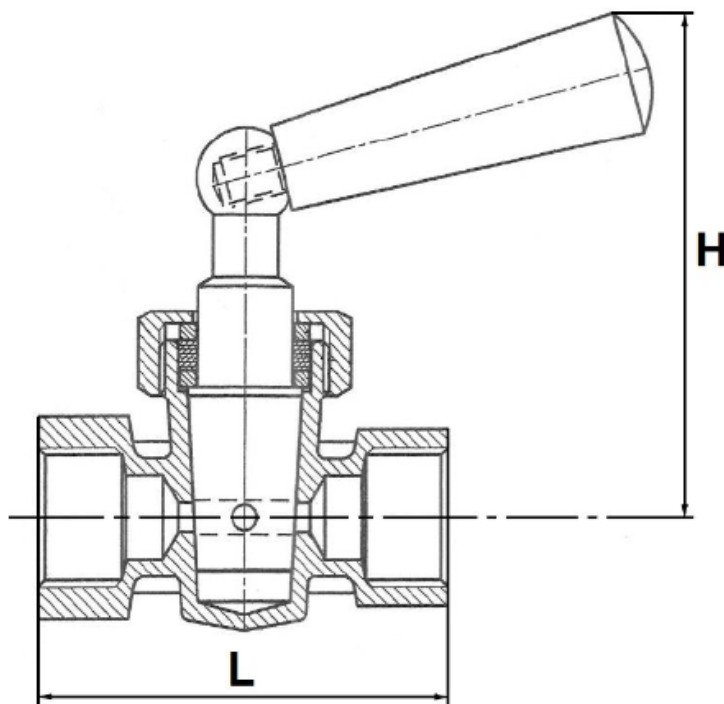

Ref.	DN	1/4"	3/8"	1/2"
MH	L	46	50	56
	H		60	
	Weight (Kg)	0.13	0.14	0.18