

STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100

TYPE: MM/E100-..



Size : Diameter 100

Ends : Male BSP

Min Temperature : + 0°C (Ambient -20°C)

Max Temperature : + 100°C(Ambient +60°C)

Pressure : From -1 to 60 Bars

Specifications : All stainless steel
Stainless steel mechanism
Dry dial (to be fitted in)
Safety glass

Materials : SS 304



STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100

TYPE: MM/E100-..

SPECIFICATIONS :

- All stainless steel
- Stainless steel mechanism
- Dry dial (to be fitted in)
- Safety glass
- 1 class
- Protection IP65
- Bottom connection BSP threaded
- With vent security

USE :

- Not for viscous or crystallizing liquid
- Min and max Temperature Ts : 0°C to +100°C (ambience -20°C à + 60°C)

RANGE :

- All stainless steel pressure gauge with dry dial Ø 100 with bottom BSP 1/2" male connection, range -1/+1 to 0/60 bars

STANDARDS :

- Fabrication according to ISO 9001 : 2008
- Designing according to EN 837-1
- DIRECTIVE 97/23/CE : Products excluded from directive (article 3, § 3)
- Threaded male BSP cylindrical ends according to ISO 228-1

STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100

TYPE: MM/E100-..

GRADUATIONS :

Range (bar)	Graduation (bar)
-1 / +1	0,05
0 / 1,6	0.02
0 / 2,5	0.05
0 / 4	0,1
0 / 6	0,1
0 / 10	0,2
0 / 16	0,2
0 / 25	0,5
0 / 40	1
0 / 60	1


MATERIALS :

DESIGNATION	MATERIALS
Box	SS 304
Fitting	SS 316
Mechanism	SS 316
Dial	Aluminium
Glass	Safety glass
Needle	Aluminium

STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100

SIZE (in mm):

TYPE: MM/E100-..

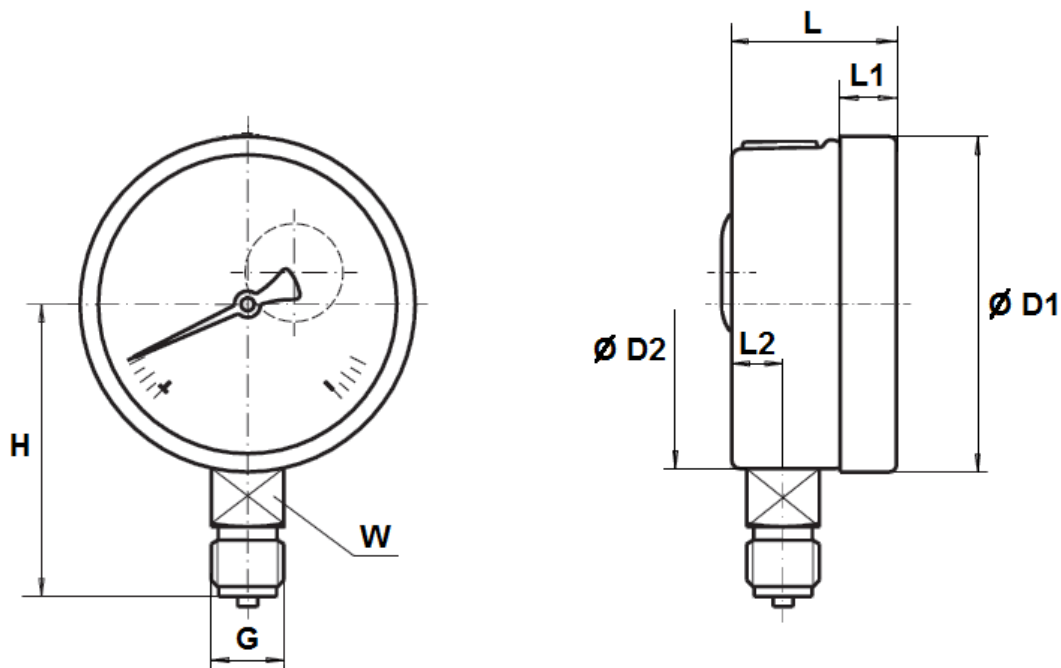

DN	100
Ø D1	100.8
Ø D2	99
H	90
G	1/2" BSP
L	48
L1	14
L2	16
W	22
Weight (Kg)	0.500